

NOTES

- 1.) ALL STL. MEMBERS COATED W/ ZINC RICH EPOXY THEN FINISHED W/ POLYESTER POWDER COATING.
- 2.) 1/2" X 3 3/4" EXPANSION ANCHOR BOLTS PROVIDED.
- 3.) COVER HINGES OPEN FOR REMOVAL OF LINER.



RECEPTACLE

DATE DRAWN: 11/24/14 DRAWN BY: JSB DATE REV.: 3/28/16 REV. BY: JSB

REV.

DRAWING NUMBER 474-32VS-FTO

SHEET 1 OF 2

NOTES:

1.) THE ACTUAL PARTS WILL NOT BE NUMBERED. NUMBERS ONLY APPLY TO DRAWING.

2.) MOUNT AND ANCHOR AS SPECIFIED.


TOOLS REQ'D

DRILL

1/2" MASONRY DRILL BIT

PARTS LIST					
ITEM	QTY	PART NO	DESCRIPTION		
1	1	0-474-32VS-FT0	32 GAL RECEPTACLE ASSEMBLY W/ FLAT TOP		
2	1	49-32T	32 GAL PLASTIC LINER		
KITS PROVIDED					

1(110 11(01))25				
ITEM	QTY	PART NO	DESCRIPTION	
3	1	K-ANC0860-3	1/2" X 3 3/4" SS ANCHOR KIT (3PCS)	

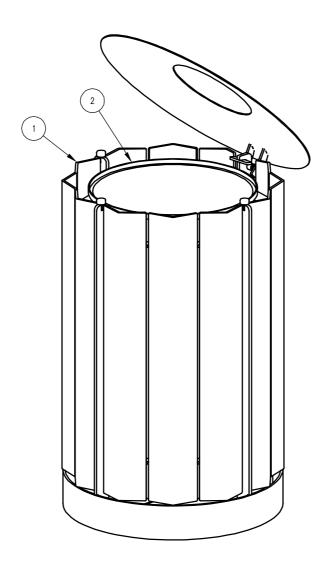



ASSEMBLY **INSTRUCTIONS**

DATE DRAWN : 11/24/14 DRAWN BY : JSB DATE REV. : 3/28/16 REV. BY : JSB

REV.

C

DRAWING NUMBER

474-32VS-FTO

SHEET 2 OF 2